

Noise spectrum of a quantum dot-resonator lasing circuit

Jinshuang Jin,^{1,2} Michael Marthaler,¹ Pei-Qing Jin,^{1,3} Dmitry Golubev,⁴ and Gerd Schön^{1,4,5}

¹*Institut für Theoretische Festkörperphysik, Karlsruhe Institute of Technology, 76128 Karlsruhe, Germany*

²*Department of Physics, Hangzhou Normal University, Hangzhou 310036, China*

³*Institute of Logistics Engineering, Shanghai Maritime University, Shanghai 201306, China*

⁴*Institute für Nanotechnologie, Karlsruhe Institute of Technology, 76021 Karlsruhe, Germany*

⁵*DFG Center for Functional Nanostructures, Karlsruhe Institute of Technology, 76128 Karlsruhe, Germany*

(Dated: October 23, 2012)

Single-electron tunneling processes through a double quantum dot can induce a lasing state in an electromagnetic resonator which is coupled coherently to the dot system. Here we study the noise properties of the transport current in the lasing regime, i.e., both the zero-frequency shot noise as well as the noise spectrum. The former shows a remarkable super-Poissonian behavior when the system approaches the lasing transition, but sub-Poissonian behavior deep in the lasing state. The noise spectrum contains information about the coherent dynamics of the coupled dot-resonator system. It shows pronounced structure at a frequency matching that of the resonator due to the excitation of photons. For strong interdot Coulomb interaction we find asymmetries in the auto-correlation noise spectra of the left and right junctions, which we trace back to asymmetries in the incoherent tunneling channels.

I. INTRODUCTION

A variety of fundamental quantum effects and phenomena characteristic for cavity quantum electrodynamics (QED) have been demonstrated in superconducting circuit QED.^{1–4} The equivalent of single-atom lasing has been observed when a single Josephson charge qubit is strongly coupled to a superconducting transmission line resonator.^{5,6} This progress stimulated the study of a different circuit QED setup where the superconducting qubit is replaced by a semiconductor double quantum dot with discrete charge states. Incoherent single-electron tunneling through the double dot sandwiched between two electrodes can lead to a population inversion and induce a lasing state in the resonator.^{7,8} Note that this setup differs from a driven interband-transition semiconductor laser,^{9,10} where the cavity mode is coupled to the lowest quantum dot interband transition driven by carrier injection in a p-n-junction or via optical pumping.

Since the double quantum dot – resonator circuit is driven by single-electron tunneling, the lasing state correlates with electron transport properties, which allows probing the former via a current measurement.⁸ Further information about the system is contained in the current fluctuations. Due to the charge discreteness the noise is shot noise. It has been studied extensively, both theoretically and experimentally.^{11–17} For the double dot – resonator lasing circuit it is interesting to compare the electron shot noise with the fluctuations of the photons in the resonator.

Although more difficult, experimental progress has also been made towards measuring the finite-frequency noise spectrum.¹⁸ It contains information about the full dynamics of the system, including the relevant time scales that characterize the transport process. In the present work, we therefore investigate the frequency-dependent noise spectrum of the transport current through the system in and near the lasing regime. It shows pronounced

characteristic signals at frequencies close to the eigen-Rabi frequency of the coupled system or matching that of the resonator.

This paper is organized as follows. In Sec. II, we introduce the model of a quantum dot-resonator lasing circuit and the methods. We extend the work of Ref. 8, where strong interdot Coulomb interaction is assumed, to arbitrary strength interaction. The method used for the calculation of the noise spectrum is based on a master equation combined with the quantum regression theorem. In Sec. III, the stationary properties of the resonator, the average current, and the zero-frequency noise are studied. The finite-frequency noise spectrum is evaluated in Sec. IV for the low- and high-frequency regimes, both for strong and weak interdot Coulomb interaction. We find symmetric and asymmetric characteristic features in the frequency-dependent noise spectrum. We conclude with a discussion in Sec. V.

II. METHODOLOGY

A. Model

We consider the electron transport setup schematically shown in Fig. 1, where electrons tunnel through a semi-conducting double quantum dot coupled to a high- Q electromagnetic resonator such as a superconducting transmission line. The Hamiltonian includes the interacting dot-resonator system, $H_S = H_d + H_r + H_1$, which is responsible for the coherent dynamics. The double dot is described by

$$H_d = \sum_j \varepsilon_j d_j^\dagger d_j + U d_l^\dagger d_l d_r^\dagger d_r + \frac{t_c}{2} (d_l^\dagger d_r + d_r^\dagger d_l), \quad (1)$$

with $d_j^\dagger$ being the electron creation operators for the two levels in the dots j ($j = l, r$) with energies ε_j , separated

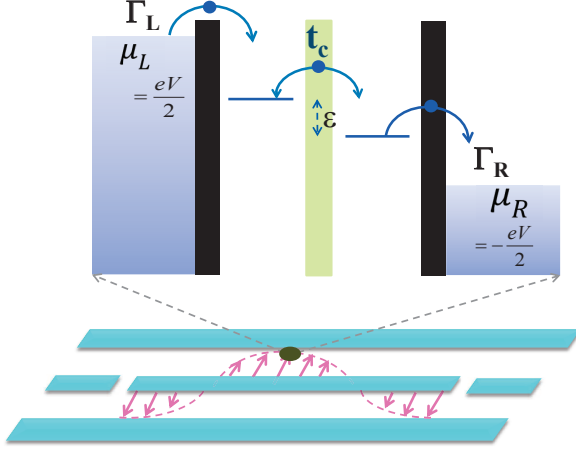


FIG. 1. (Color online) A double quantum dot-resonator lasing circuit. The dot is placed at a maximum of the electric field of the transmission line in order to maximize the dipole interaction. The population inversion in the dot levels, leading to the lasing state, is created by incoherent electron tunneling through the dots, driven by the bias voltage, which is assumed to be high, $eV = \mu_L - \mu_R \gg \omega_r$.

by $\varepsilon = \varepsilon_l - \varepsilon_r$, which are coupled coherently with strength t_c . Both ε_j and t_c can be tuned by gate voltages.^{19–23} The interdot Coulomb interaction is denoted by U . The transmission line can be modeled as a harmonic oscillator, $H_r = \omega_r a^\dagger a$, with frequency ω_r and $a^\dagger$ the creation operator of photons in the resonator. The dipole moment induces an interaction between the resonator and the double dot, H_I , which will be specified below.

We further account for electron tunneling between the dots and electrodes, $H_t = \sum_k (V_{Lk} c_{Lk}^\dagger d_l + V_{Rk} c_{Rk}^\dagger d_r + \text{H.c.})$, with tunneling amplitudes $V_{\alpha k}$ (with $\alpha = L, R$). The electrodes with $H_b = \sum_{\alpha k} \varepsilon_{\alpha k} c_{\alpha k}^\dagger c_{\alpha k}$ act as baths. Here $c_{\alpha k}^\dagger$ is the electron creation operator for an electron state in the electrode α . Below, the tunneling between the electrodes and the dots is assumed to be an incoherent process.

The double dot can be biased such that at most one electron occupies each dot. The two charge states $|L\rangle$ and $|R\rangle$ serve as basis of a charge qubit.^{24,25} In the present work, we consider two limits, (i) strong U and (ii) weak U , respectively. In case (i) transport through the double dots involves only one extra third state, namely the empty-dot $|0\rangle$, while in case (ii) two extra states, $|0\rangle$ and the double occupation state $|2\rangle \equiv |LR\rangle$, are involved in the transport. In both limits the dipole interaction between the resonator and the double dot is, $H_I = \hbar g_0 (a^\dagger + a) \tau_z$, with Pauli matrices acting in the space of the two charge states, $\tau_z = |L\rangle\langle L| - |R\rangle\langle R|$.

In the eigenbasis of the double dot and within rotating wave approximation, the Hamiltonian of the coupled dot-resonator system, for strong interdot Coulomb inter-

action, can be reduced to

$$H_S = \frac{\hbar\omega_0}{2} \sigma_z + \hbar\omega_r a^\dagger a + \hbar g (a^\dagger \sigma_- + a \sigma_+), \quad (2)$$

while for weak interdot interaction an extra term $U|2\rangle\langle 2|$ is to be included. In the restricted space of states we have $d_l = |0\rangle\langle L| + |R\rangle\langle 2|$ and $d_r = |0\rangle\langle R| - |L\rangle\langle 2|$, and the Pauli matrix operates in the eigenbasis, i.e., $\sigma_z = |e\rangle\langle e| - |g\rangle\langle g|$ with

$$\begin{aligned} |e\rangle &= \cos(\theta/2) |L\rangle + \sin(\theta/2) |R\rangle, \\ |g\rangle &= \sin(\theta/2) |L\rangle - \cos(\theta/2) |R\rangle. \end{aligned} \quad (3)$$

Here, we set the zero energy level as $\varepsilon_l + \varepsilon_r = 0$. The angle $\theta = \arctan(t_c/\varepsilon)$ characterizes the mixture of the pure charge states, the coupling strength is $g = g_0 \sin \theta$, and $\omega_0 = \sqrt{\varepsilon^2 + t_c^2}/\hbar$ denotes the level spacing of the two eigenstates. It can be tuned via gate voltages, which allows control of the detuning $\Delta = \omega_0 - \omega_r$ from the resonator frequency.

B. Master equation

The dynamics of the coupled dot-resonator system, which is assumed to be weakly coupled to the electron reservoirs with smooth spectral density, can be described by a master equation for the reduced density matrix ρ in the Born-Markov approximation.^{26,27} Throughout this paper we consider low temperatures, $T = 0$, with vanishing thermal photon number and excitation rates. Consequently, the master equation is

$$\dot{\rho} = -\frac{i}{\hbar} [H_S, \rho] + \mathcal{L}_L \rho + \mathcal{L}_R \rho + \mathcal{L}_r \rho \equiv \mathcal{L}_{\text{tot}} \rho, \quad (4a)$$

where the dissipative dynamics is described by Lindblad operators of the form

$$\mathcal{L}_i \rho = \frac{\Gamma_i}{2} \left(2L_i \rho L_i^\dagger - L_i^\dagger L_i \rho - \rho L_i^\dagger L_i \right). \quad (4b)$$

The first two terms $\mathcal{L}_{L/R}$ account for the incoherent sequential tunneling between the electrodes and the dots with $\Gamma_\alpha(\omega) = 2\pi \sum_k |V_{\alpha k}|^2 \delta(\omega - \varepsilon_{\alpha k}) \equiv \Gamma_\alpha$. For the assumed high voltage and low temperature, i.e., in the absence of reverse tunneling processes, we have $L_L = d_l^\dagger$ and $L_R = d_r$ with tunneling rates Γ_L and Γ_R , respectively. For the oscillator we take the standard decay term $L_r = a$ with rate $\Gamma_r = \kappa$. Here, we ignore other dissipative effects, such as relaxation and dephasing of the two charge states, which were studied in Ref. 8, since such effects do not affect the main points we wish to study.

From the definition $I_\alpha(t) \equiv -e \frac{d\langle n_\alpha(t) \rangle}{dt}$ with $n_\alpha = \sum_k c_{\alpha k}^\dagger c_{\alpha k}$, it is straightforward to obtain the transport current from the electrodes to the dots,^{28,29} $I_\alpha(t) = \text{Tr}[\hat{I}_\alpha \rho(t)]$, with current operators given by

$$\hat{I}_L \rho(t) = \frac{e}{\hbar} \Gamma_L d_l^\dagger \rho(t) d_l, \quad (5a)$$

$$\hat{I}_R \rho(t) = -\frac{e}{\hbar} \Gamma_R d_r \rho(t) d_r^\dagger, \quad (5b)$$

In the stationary limit, $t \rightarrow \infty$, the average current satisfies $I = \frac{1}{2}(I_L - I_R) = I_L = -I_R$, consistent with charge conservation.

C. Current noise spectrum

We consider the symmetrized current noise spectrum

$$\begin{aligned} S(\omega) &= \mathcal{F}\{\langle \delta \hat{I}(t), \delta \hat{I}(0) \rangle\} \\ &\equiv \int_{-\infty}^{\infty} dt e^{i\omega t} \langle \{\delta \hat{I}(t), \delta \hat{I}(0)\} \rangle \\ &= 2 \text{Re}\{\tilde{G}_I(\omega) + \tilde{G}_I(-\omega)\}, \end{aligned} \quad (6)$$

where $\delta \hat{I}(t) = \hat{I}(t) - I$ and $\tilde{G}_I(\pm\omega) = \int_0^\infty dt e^{\pm i\omega t} G_I(t)$ with $G_I(t) = \langle \delta \hat{I}(t) \delta \hat{I}(0) \rangle$. In Born-Markov approximation, the current noise spectrum can be calculated via the widely used MacDonald's formula³⁰ or the quantum regression theorem.²⁶ Since we already know the current operators, as expressed in Eq. (5), it is more convenient to calculate the current correlation function via the quantum regression theorem,

$$G_I(t) = \text{Tr}[\hat{I} e^{\mathcal{L}_{\text{tot}} t} \hat{I} \rho^{\text{st}}] - I^2, \quad (7)$$

where ρ^{st} denotes the steady-state density matrix.

According to the Ramo-Shockley theorem, the measured quantity in most experiments¹³ is the total circuit current $I(t) = aI_L(t) - bI_R(t)$, with coefficients, $a + b = 1$, depending on the symmetry of the transport setup (e.g., the junction capacitances). The circuit noise spectrum is thus composed of three components: $S(\omega) = a^2 S_L(\omega) + b^2 S_R(\omega) - 2ab S_{LR}(\omega)$,^{13,31} where $S_\alpha(\omega) = \mathcal{F}\{\langle \delta \hat{I}_\alpha(t), \delta \hat{I}_\alpha(0) \rangle\}$ are the auto-correlation noise spectra of the current from lead- α , and $S_{LR}(\omega) = (\mathcal{F}\{\langle \delta \hat{I}_L(t), \delta \hat{I}_R(0) \rangle\} + \mathcal{F}\{\langle \delta \hat{I}_R(t), \delta \hat{I}_L(0) \rangle\})/2$ is the current cross-correlation noise spectrum between different leads. Alternatively, in view of the charge conservation, i.e., $I_L = I_R + dQ/dt$, where Q is the charge on the central dots, the circuit noise spectrum can be expressed as³²⁻³⁴ $S(\omega) = aS_L(\omega) + bS_R(\omega) - abS_C(\omega)$ with $S_C \equiv \mathcal{F}\{\langle \delta \dot{Q}(t), \delta \dot{Q}(0) \rangle\} = 2S_{LR}(\omega) + S_L(\omega) + S_R(\omega)$.³⁵ Thus, from the behavior of the auto-correlation and cross-correlation noise spectra, which will be studied in the following, we can fully understand the circuit noise spectrum even including the charge fluctuation spectrum in the central dots, $S_C(\omega)$. At zero frequency, we have $S(0) = S_L(0) = S_R(0) = -S_{LR}(0)$ and $S_C(0) = 0$ due to current conservation in the steady-state.

III. STATIONARY PROPERTIES

Let us first recall the parameter regime for which, according to Ref. 8, lasing can be induced for the present setup.³⁶⁻³⁸ We consider the level spacing in the dots comparable to the resonator frequency ω_r in the range of

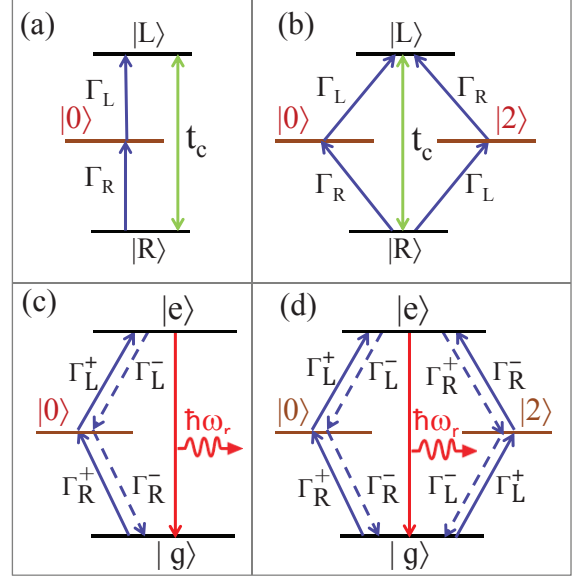


FIG. 2. (Color online) Incoherent electron tunneling induces transitions between different states in the dot. The upper panels, (a) and (b), and the lower ones, (c) and (d), describe the incoherent transitions in the dot-basis and eigen-basis (including the interaction with the resonator), respectively. Panels (a) and (c) correspond to asymmetric transition channels for strong interdot Coulomb interaction, and (b) and (d) to symmetric transition channels for weak interdot Coulomb interaction. Furthermore, we have $\Gamma_\alpha^+ = \Gamma_\alpha \cos^2(\theta/2)$ and $\Gamma_\alpha^- = \Gamma_\alpha \sin^2(\theta/2)$ with $\alpha = L, R$.

few GHz, and a high quality resonator with Q factor assumed to be 5×10^4 , corresponding to a decay rate $\kappa = 2 \times 10^{-5} \omega_r$. The coupling of dot and resonator, assumed to be $g_0 = 10^{-3} \omega_r$, is strong enough compared to the photon decay rate in the resonator, and we also assume weak incoherent tunneling with $\Gamma_L = \Gamma_R = \Gamma = 10^{-3} \omega_r$ to be a few MHz throughout of the paper, unless otherwise stated.

A crucial prerequisite for lasing is a pumping mechanism,^{5,39} involving a third state, which creates a population inversion in the two-level system. In Ref. 8, the empty state $|0\rangle$ in the double dot was considered as the single third state under the assumption of strong charging energy, $\varepsilon_j + U > \mu_L > \varepsilon_j > \mu_R$. This limit, which we call case (i), is sketched in Fig. 2 (a). On the other hand, the interdot Coulomb interaction may also be weaker compared to the level spacing of the charge states. In the tunneling regime we have $\mu_L > \varepsilon_j, \varepsilon_j + U > \mu_R$. This limit, called case (ii), where two extra states are involved in the incoherent tunneling, is shown in Fig. 2 (b). The question arises, which case is better for lasing.

Let us first consider the key factor for lasing, i.e., the population inversion defined by $\tau_0 = (\rho_e^{\text{st}} - \rho_g^{\text{st}}) / (\rho_e^{\text{st}} + \rho_g^{\text{st}})$, with $\rho_i^{\text{st}} = \sum_n \langle i, n | \rho^{\text{st}} | i, n \rangle$ being the stationary population of the state of the dots

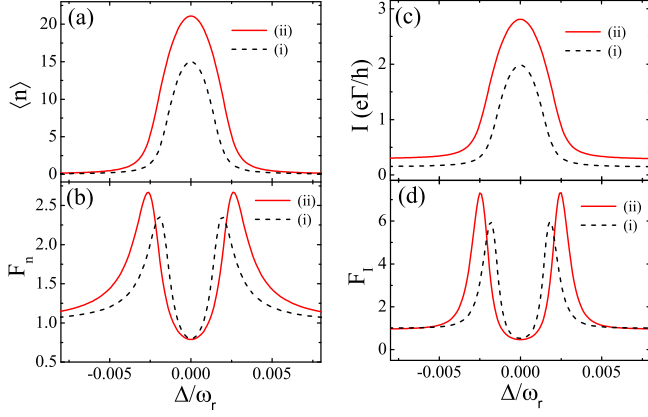


FIG. 3. (Color online) (a) Average photon number $\langle n \rangle$, (b) Fano factor $F_n = (\langle n^2 \rangle - \langle n \rangle^2) / \langle n \rangle^2$ of photons in the resonator, (c) average current I , and (d) Fano factor of the current $F_I = S(0)/2I$, as function of detuning for weak Coulomb interaction (red solid line) and strong interaction (black dashed line). Throughout this paper we choose the tunneling rate $\Gamma = 10^{-3}\omega_r$ and interdot coupling strength $t_c = 0.3\omega_r$.

($i = e, g$). Explicitly, we find

$$\tau_0 = \begin{cases} \frac{(\Gamma_R^2/\omega_0^2 + 4) \cos \theta}{\Gamma_R^2/\omega_0^2 + 3 + \cos 2\theta}; & \text{for case (i)} \\ \frac{(\Gamma_0^2/\omega_0^2 + 4) \cos \theta}{\Gamma_0^2/\omega_0^2 + 3 + \cos 2\theta}; & \text{for case (ii)} \end{cases}, \quad (8)$$

with $\Gamma_0 = \Gamma_L + \Gamma_R$. The population inversion does not depend on Γ_L for case (i), while it depends on both tunneling rates for case (ii). It suggests that the population inversion is driven by transitions from the low-level state, $|R\rangle$, to the extra states $|0\rangle$ and $|2\rangle$. See Fig. 2 (a) and (b) for case (i) and (ii), respectively. Although in general, an additional incoherent tunneling channel reduces the population inversion slightly, for the parameters studied in the present work, i.e., $\Gamma \ll \omega_r$, it approaches the same value for both cases (i) and (ii), $\tau_0 \approx 4 \cos \theta / (3 + \cos 2\theta)$, which reaches a maximum, $\tau_0 \rightarrow 1$, for $\theta \rightarrow \pi/2$. To balance the effective dot-resonator coupling $g = g_0 \sin \theta$ and the population inversion τ_0 , following the consideration in Ref. 8, we set the interdot coupling strength $t_c = 0.3\omega_r$ throughout this work.

The properties of the resonator can be characterized by the average number of photons $\langle n \rangle$ and the Fano factor $F_n \equiv (\langle n^2 \rangle - \langle n \rangle^2) / \langle n \rangle^2$ describing their fluctuations.¹⁰ Upon varying the detuning between dot and resonator from large values down to zero, the system undergoes a transition from the nonlasing regime, where $\langle n \rangle < 1$ and $F_n = \langle n \rangle + 1$, to a lasing state with a sharp increase in the photon number. At the transition to the lasing regime the amplitude fluctuations lead to a peak in the Fano factor, as shown in Fig. 3 (b). In the lasing state the photon number is saturated, and the Fano factor drops to $F_n < 1$, indicating a squeezed state. Interestingly, the average photon number in the lasing regime as well as the

corresponding Fano factor peak at the lasing transition is larger for case (ii) than for case (i). Approximately, we obtain the average photon number⁴⁰ for case (ii)

$$\langle n \rangle \simeq \frac{\Gamma \cos \theta}{2\kappa} - \frac{\Gamma^2 + 4\Delta^2}{8g^2}. \quad (9)$$

Compared to case (i), where⁸ $\langle n \rangle \simeq \frac{\Gamma \cos \theta}{3\kappa} - \frac{\Gamma^2 + 4\Delta^2}{96g^2} (7 + \cos \theta)$, we find an increase by $\delta \langle n \rangle = \langle n \rangle_{ii} - \langle n \rangle_i \approx \frac{\Gamma}{6\kappa}$, showing that case (ii) with four levels is more suited for lasing. The difference is due to the existence of one more incoherent tunneling channel, driven as shown in Fig. 2 (b) and (d).

Since photons in the resonator are excited by the incoherent tunneling between the dot and the electrodes, the lasing state closely correlates with the transport current. The current can be expressed approximately (for $\kappa \ll \Gamma$ and small θ) for case (i) as⁸

$$I(\Delta) \simeq e\Gamma \sum_{n=0} P(n) \frac{(n+1)}{3(n+1) + (\Gamma^2 + 4\Delta^2)/4g^2} \quad (10)$$

with $P(n) \simeq (\Gamma/\kappa)P(0) \prod_{l=1}^n [3l + (\Gamma^2 + 4\Delta^2)/4g^2]^{-1}$ being the probability of n photons in the resonator (in Ref. 8 a factor $\frac{1}{2}$ was missing). As shown in Fig. 3 (c), the transport current as function of the detuning follows closely the behavior of the average photon number. Similarly, the corresponding transport current for case (ii) is obtained as,

$$I(\Delta) \simeq e\Gamma \sum_{n=0} P(n) \frac{(n+1)}{2(n+1) + (\Gamma^2 + 4\Delta^2)/4g^2}, \quad (11)$$

where $P(n) \simeq (\Gamma/\kappa)P(0) \prod_{l=1}^n [2l + (\Gamma^2 + 4\Delta^2)/4g^2]^{-1}$. Both the average photon number of the resonator as well as the current are larger for case (ii) than for case (i).

The fluctuations of the photons are correlated with the zero-frequency shot noise of the current, as illustrated for the Fano factor $F_I = S(0)/2I$ in Fig. 3 (d). For strong detuning in the nonlasing regime, where the dots effectively do not interact with the resonator, the shot noise shows a Poissonian distribution, i.e., $F_I \simeq 1$. Near the lasing transition the shot noise is enhanced strongly with a super-Poissonian distribution. Compared to the Fano factor of the photons, the signal in the shot noise is stronger with a narrower transition window and sharper peak. In the lasing state, where the photons are saturated and the transport current reaches the maximum value, we find sub-Poissonian current noise, $F_I \simeq 0.5$, while the photon Fano factor F_n describes a squeezed state of the radiation field in this nonclassical regime, differing from a conventional coherent state with Poissonian distribution. The cross-correlation noise (not displayed in the figures) shows a similar behavior with the opposite sign due to the relation of $S_L(0) = S_R(0) = -S_{LR}(0)$.

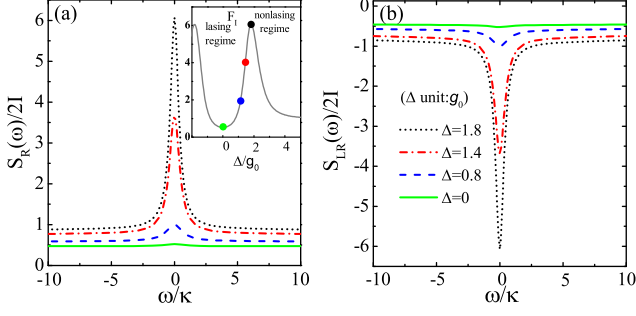


FIG. 4. (Color online) The noise spectra in the low-frequency regime for strong interdot Coulomb interaction. (a) Auto-correlation $S_L(\omega) = S_R(\omega)$. (b) Cross-correlation $S_{LR}(\omega)$. Different colors of the plotted noise spectra refer to different values of the detuning, as denoted in the inset of (a) by color circles. The other parameters are the same as in Fig. 3

IV. NOISE SPECTRUM

Since in the nonlasing regime the noise spectrum displays only trivial features, we focus in the following on the finite-frequency noise spectra in the lasing regime and at the lasing transition, as shown in the inset of Fig. 4(a). For tunneling dissipative operators $\mathcal{L}_L$ and $\mathcal{L}_R$ as defined after Eq. (4b) it has been demonstrated⁴¹ that all correlation functions can be expanded in terms of the eigenvalues λ_k of $\mathcal{L}_{\text{tot}}$ and the coefficients $c_k = [\hat{V}^{-1} \hat{I}_\alpha \hat{V}]_{kk}$. Here $\hat{V}$ is built from the eigenvectors of $\mathcal{L}_{\text{tot}}$, and $\hat{I}_\alpha$ is the current operator described in Eq. (5). E.g., we have

$$\frac{S_\alpha(\omega)}{2I} = 1 - 2 \sum_k \frac{\text{Re}(c_k) \text{Re}(\lambda_k) + \text{Im}(c_k) [\omega + \text{Im}(\lambda_k)]}{[\omega + \text{Im}(\lambda_k)]^2 + [\text{Re}(\lambda_k)]^2}, \quad (12)$$

where the imaginary part $\text{Im}(\lambda_k)$ and real part $\text{Re}(\lambda_k)$ represent the coherent and dissipative dynamics, respectively. The coherent dynamics follows from the Jaynes-Cummings Hamiltonian, Eq. (2), with eigenstates^{3,42}

$$|+, n\rangle = \cos \theta_n |e, n\rangle + \sin \theta_n |g, n+1\rangle, \quad (13)$$

$$|-, n\rangle = \sin \theta_n |e, n\rangle - \cos \theta_n |g, n+1\rangle, \quad (14)$$

and eigenenergies

$$E_{\pm, n} = (n+1)\omega_r \pm \frac{1}{2} \sqrt{4g^2(n+1) + \Delta^2}. \quad (15)$$

with $\theta_n = \frac{1}{2} \tan^{-1} \left(\frac{2g\sqrt{n+1}}{\Delta} \right)$. The typical signal in the spectrum of the noise is dominated by these eigenenergies, while the linewidth of the signal follows from the jump operators in Eq. (4b).

A. Low-frequency regime

Let us first consider the very low frequency regime around $\omega \sim 0$ displayed in Fig. 4. We find a zero-frequency peak and dip in the auto- and cross-correlation

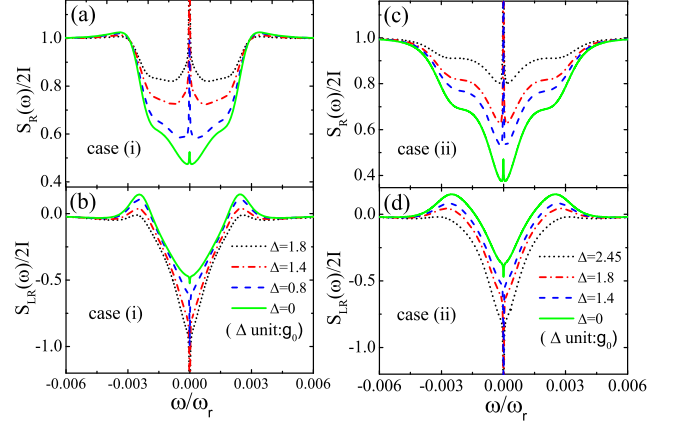


FIG. 5. (Color online) The low-frequency auto-correlation and cross-correlation noise spectrum for different values of the detuning in the lasing regime. Panel (a) and (b) are for strong interdot Coulomb interaction, and (c) and (d) for weak interdot Coulomb interaction. The other parameters are the same as in Fig. 3.

noise spectra, respectively. Both decrease and finally disappear when one approaches the lasing state. The height of the zero-frequency peak as function of a detuning is shown in Fig. 3 (d). Since in the absence of a resonator we have $S_\alpha(\omega \approx 0)/2I = -S_{LR}(\omega \approx 0)/2I \simeq 1$, the peak/dip feature at zero-frequency in the noise spectra must be the effect of the resonator.

The noise spectra in Fig. 4 have a Lorentzian shape with linewidth $\gamma_0 \sim \kappa$, characterized by the emission spectrum of the photons.⁴³ In the regime around zero-frequency, corresponding to the long-time limit, the noise spectra are determined by the single minimum eigenvalue λ_{min} with its real part dominated by the weakest decay rate, i.e., κ . For weak interdot Coulomb interaction, where we have to account for one more incoherent tunneling channel (see Fig. 2 (b) and (d)) the low-frequency noise spectra display a similar behavior as in Fig. 4 (d), except for the enhancement of the zero-frequency peak as shown in Fig. 3. It is worth noting that in this low-frequency regime, the relation $S_L(\omega \sim 0) = S_R(\omega \sim 0) = -S_{LR}(\omega \sim 0)$ is still satisfied. However, as we will show below, the cross-correlation noise changes sign beyond the low-frequency regime.

At higher frequencies but still within the range $|\omega| < \omega_r$, the spectra are no longer Lorentzian due to the contributions from several λ_k in Eq. (12). We find characteristic features showing a step and peak in the auto- and cross-noise spectra, respectively, as shown in Fig. 5. The position of the step/peak is nearly independent of the detuning, while the magnitude is sensitive to it. With increasing dot-resonator interaction, both the step and peak are shifted as shown in Fig. 6. These characteristics are a consequence of the coherent dynamics of the coupled dot-resonator system. The step/peak is at $\omega = \delta E$, where $\delta E = |E_{+, \langle n \rangle} - E_{-, \langle n \rangle}| = \sqrt{4g^2(\langle n \rangle + 1) + \Delta^2} \approx$

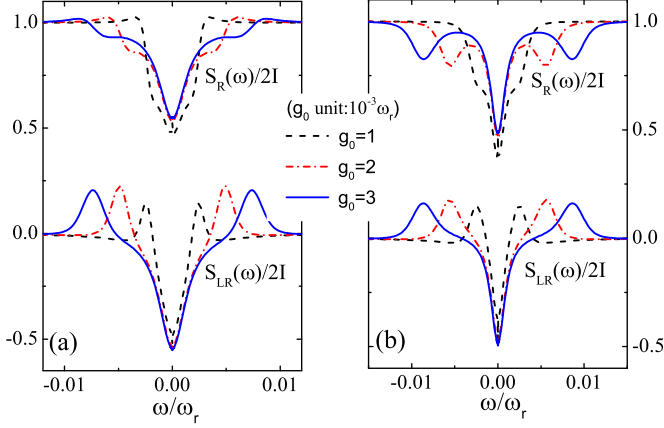


FIG. 6. (Color online) The low-frequency noise spectra for different dot-resonator coupling strength in the lasing state at $\Delta = 0$, (a) for strong interdot Coulomb interaction, and (b) for weak interdot Coulomb interaction. The other parameters are the same as in Fig. 3.

$2g(\langle n \rangle + 1)$, is the Rabi frequency for the photon number $\langle n \rangle$, where the photon number distribution is peaked. As expected this coherent signal of the step/peak becomes weak and even disappears with increasing incoherent tunneling rate Γ (not shown in the figure). Interestingly, as shown in Fig. 6 (b), we find that with increasing dot-resonator interaction, the coherent signal for weak interdot Coulomb interaction is not only shifted, but the step also turns into a dip. This is consistent with the coherent signal of the Rabi frequency in the double dot in the absence of the resonator showing a dip and peak in the auto- and cross-correlation noise spectra, respectively.⁴⁴ It arises from the recovered symmetrical transition tunneling channels [Fig. 2 (b) and (d)]. In the low-frequency regime, $\omega < |\omega_r|$, the auto-correlation noise spectra of left and right lead satisfy $S_L(\omega) = S_R(\omega)$ which however is no longer true in the high-frequency regime $\omega \gtrsim |\omega_r|$ for strong interdot Coulomb interaction as will be studied in the following subsection.

B. Regime close to the resonator frequency

Before addressing the noise spectrum in the high-frequency regime, let us briefly discuss its properties in the absence of the resonator. It has been demonstrated^{33,34} that the signal of the intrinsic Rabi frequency ω_0 of the double dots can be extracted from the noise spectra. For instance, the auto-correlation noise spectrum shows a dip-peak structure and a dip at $\omega = \omega_0$ for strong and weak interdot Coulomb interaction, respectively.^{33,34} Considering the present parameter regime, where lasing is induced for $\omega_0 \approx \omega_r$ with very weak incoherent tunneling, $\Gamma = 10^{-3}\omega_0$, we find in the strong Coulomb interaction case nearly Poissonian noise in the full-frequency regime, with a small

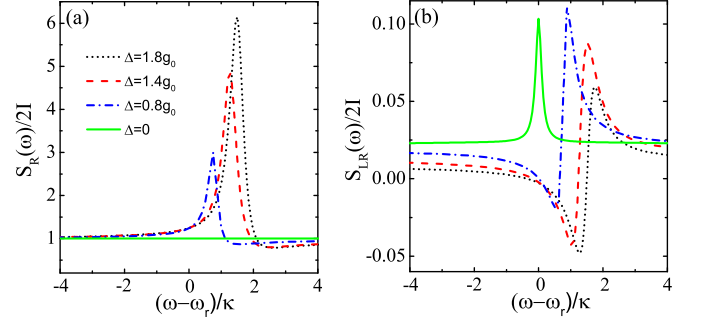


FIG. 7. (Color online) The finite-frequency noise spectra for strong Coulomb interaction in the lasing regime, with (a) an auto-correlation $S_R(\omega)$ and (b) the cross-correlation $S_{LR}(\omega)$. The other parameters are the same as in Fig. 3.

correction due to a weak coherent Rabi signal, i.e., $S_\alpha(\omega_0)/2I \sim 1 \pm 5 \times 10^{-5}$. The correction can be neglected compared to the signal induced by the coupled resonator as shown in Fig. 7.

The signals in the high-frequency noise spectrum arise because of transitions with the energy $E_{\pm,n} - E_{\pm,n-1} \approx \omega_r$. They depend on the detuning in the same way as the spectrum of the oscillator.⁴⁵ Namely for positive detuning we find a signal at frequencies somewhat higher than ω_r and for negative detuning at frequencies below ω_r . In contrast to the low-frequency case, for high frequencies the spectra of the current in the left and right junction, $S_L(\omega)$ and $S_R(\omega)$, do not have to be equal. In this case we find significant differences between the cases (i) and (ii) of strong and weak Coulomb interaction. In the case of strong Coulomb interaction we get the correlators,

$$\begin{aligned} \langle I_L(t)I_L(0) \rangle &= \sum_n \langle n | \langle 0 | \rho_{I_L}(t) | 0 \rangle | n \rangle \\ \langle I_R(t)I_R(0) \rangle &= \sum_n \langle n | \langle R | \rho_{I_R}(t) | R \rangle | n \rangle, \end{aligned} \quad (16)$$

while for weak Coulomb interaction we get

$$\begin{aligned} \langle I_L(t)I_L(0) \rangle &= \sum_n \langle n | [\langle 0 | \rho_{I_L}(t) | 0 \rangle + \langle R | \rho_{I_L}(t) | R \rangle] | n \rangle \\ \langle I_R(t)I_R(0) \rangle &= \sum_n \langle n | [\langle R | \rho_{I_R}(t) | R \rangle + \langle 2 | \rho_{I_R}(t) | 2 \rangle] | n \rangle. \end{aligned} \quad (17)$$

Here we introduced the density matrix $\rho_{I_i}(t)$ which satisfies the master equation (4) with the initial condition $\rho_{I_i}(0) = \hat{I}_i \rho^{\text{st}}$ ($i = L, R$).

For strong Coulomb interaction only $S_R(\omega)$ couples directly to the state $|R\rangle$ which in turn couples resonantly to the oscillator. As a result we observe the signal at $\omega \approx \omega_r$ only in $S_R(\omega)$, while $S_L(\omega) \approx 1$ is unaffected by the oscillator. In contrast, in case (ii), where if we allow the state $|2\rangle$ to participate, we again find a symmetry between the currents through the right and left junction and $S_L(\omega) = S_R(\omega)$.

V. SUMMARY AND DISCUSSION

We have evaluated the frequency-dependent noise spectrum of the transport current through a coupled dot-resonator system in the lasing regime, in a situation when incoherent tunneling induces population inversion. We considered both strong and weak interdot Coulomb interactions, in the latter case taking into account the doubly occupied state as well. Both situations lead to a similar behavior of the zero-frequency shot noise but to different features in the finite-frequency noise spectrum.

When the system approaches the lasing regime the zero-frequency shot noise is enhanced strongly showing a remarkable super-Poissonian distribution. When the resonator is in the lasing state, the shot noise displays sub-Poissonian characteristics. The current follows here the behaviour of the photon distribution which is super-Poissonian as the lasing regime approaches and becomes sub-Poissonian at resonance.

We also found that the average photon number and the corresponding Fano factor, as well as the average current and its Fano factor in the lasing regime is larger for weak interdot Coulomb interaction than for strong one. The zero-frequency shot noise could be detected with current experimental technologies. E.g., a quantum point contact coupled to the dots has been demonstrated to detect in

real-time single electron tunneling through the double dot.^{16,17}

Considering the finite-frequency noise spectra we found pronounced characteristic structures in the low- and high-frequency regimes covering the full coherent dynamics of the coupled dot-resonator system. At low but finite frequencies the coherent dynamics of the oscillator is witnessed, since the spectrum shows a peak at the eigen Rabi frequency of the coupled system. At frequencies close to that of the resonator, due to the excitations of the photons in the resonator, we found for strong interdot Coulomb interaction a strongly asymmetric signal in the auto-correlation noise spectra of the left and right junction. Symmetry is restored for weak interdot Coulomb interaction. The difference arises from the asymmetrical and symmetrical incoherent tunneling channels induced by strong and weak interdot Coulomb interactions, respectively.

ACKNOWLEDGMENTS

J.S. Jin acknowledges support from the National Natural Science Foundation of China NSFC (10904029 and 10905014) as well as the support by the Ministry of Science, Research and the Arts of the State of Baden-Württemberg.

-
- ¹ A. Wallraff, D. I. Schuster, A. Blais, L. Frunzio, J. M. R. S. Huang, S. Kumar, S. M. Girvin, and R. J. Schoelkopf, *Nature* **431**, 162 (2004).
 - ² I. Chiorescu, P. Bertet, K. Semba, Y. Nakamura, C. J. P. M. Harmans, and J. E. Mooij, *Nature* **431**, 159 (2004).
 - ³ A. Blais, R.-S. Huang, A. Wallraff, S. M. Girvin, and R. J. Schoelkopf, *Phys. Rev. A* **69**, 062320 (2004).
 - ⁴ E. Il'ichev, N. Oukhanski, A. Izmailkov, T. Wagner, M. Grajcar, H.-G. Meyer, A. Y. Smirnov, A. Maassen van den Brink, M. H. S. Amin, and A. M. Zagorskin, *Phys. Rev. Lett.* **91**, 097906 (2003).
 - ⁵ O. Astafiev, K. Inomata, A. O. Niskanen, T. Yamamoto, Y. A. Pashkin, Y. Nakamura, and J. S. Tsai, *Nature* **448**, 588 (2007).
 - ⁶ J. Hauss, A. Fedorov, C. Hutter, A. Shnirman, and G. Schön, *Phys. Rev. Lett.* **100**, 037003 (2008).
 - ⁷ L. Childress, A. S. Sørensen, and M. D. Lukin, *Phys. Rev. A* **69**, 042302 (2004).
 - ⁸ P.-Q. Jin, M. Marthaler, J. H. Cole, A. Shnirman, and G. Schön, *Phys. Rev. B* **84**, 035322 (2011).
 - ⁹ O. Benson and Y. Yamamoto, *Phys. Rev. A* **59**, 4756 (1999).
 - ¹⁰ S. Strauf and F. Jahnke, *Laser Photonics Rev.* **5**, 607 (2011).
 - ¹¹ S. Hershfield, *Phys. Rev. B* **46**, 7061 (1992).
 - ¹² G.-H. Ding and T.-K. Ng, *Phys. Rev. B* **56**, R15521 (1997).
 - ¹³ Y. M. Blanter and M. Büttiker, *Phys. Rep.* **336**, 1 (2000).
 - ¹⁴ *Quantum Noise in Mesoscopic Physics* (Kluwer, Dordrecht, 2003) edited by Y. V. Nazarov.
 - ¹⁵ G. Kießlich, E. Schöll, T. Brandes, F. Hohls, and R. J. Haug, *Phys. Rev. Lett.* **99**, 206602 (2007).
 - ¹⁶ S. Gustavsson, R. Leturcq, B. Simovic, R. Schleser, T. Ihn, P. Studerus, K. Ensslin, D. C. Driscoll, and A. C. Gossard, *Phys. Rev. Lett.* **96**, 076605 (2006).
 - ¹⁷ T. Fujisawa, T. Hayashi, R. Tomita, and Y. Hirayama, *Science* **312**, 1634 (2006).
 - ¹⁸ N. Ubbelohde, C. Fricke, C. Flindt, F. Hohls, and R. J. Haug, *Nature Communications* **91**, 1 (2012).
 - ¹⁹ T. H. Oosterkamp, T. Fujisawa, W. G. van der Wiel, K. Ishibashi, R. V. Hijman, S. Tarucha, and L. P. Kouwenhoven, *Nature* **395**, 873 (1998).
 - ²⁰ D. Harbusch, S. Manus, H. P. Tranitz, W. Wegscheider, and S. Ludwig, *Phys. Rev. B* **82**, 195310 (2010).
 - ²¹ T. Hayashi, H. D. C. T. Fujisawa, and Y. Hirayama, *Phys. Rev. Lett.* **91**, 226804 (2003).
 - ²² J. R. Petta, A. C. Johnson, J. M. Taylor, E. A. Laird, A. Yacoby, M. D. Lukin, C. M. Marcus, M. P. Hanson, and A. C. Gossard, *Science* **309**, 2180 (2005).
 - ²³ K. C. Nowack, F. H. L. Koppens, Y. V. Nazarov, and L. M. K. Vandersypen, *Science* **318**, 1430 (2007).
 - ²⁴ X. Q. Li and Y. Arakawa, *Phys. Rev. A* **63**, 012302 (2001).
 - ²⁵ S. A. Gurvitz, *Phys. Rev. B* **56**, 15215 (1997).
 - ²⁶ C. W. Gardiner and P. Zoller, *Quantum Noise* (Springer-Verlag, Berlin, 2004) 2nd edition.
 - ²⁷ H. J. Carmichael, *Statistical Methods in Quantum Optics* (Springer-Verlag, Berlin, 2002).
 - ²⁸ N. Lambert and F. Nori, *Phys. Rev. B* **78**, 214302 (2008).
 - ²⁹ X. Q. Li, J. Y. Luo, Y. G. Yang, P. Cui, and Y. J. Yan, *Phys. Rev. B* **71**, 205304 (2005).

- ³⁰ D. K. C. MacDonald, *Noise and Fluctuations: An Introduction* (Wiley, New York, 1962) ch. 2.2.1.
- ³¹ H.-A. Engel and D. Loss, Phys. Rev. Lett. **93**, 136602 (2004).
- ³² D. Mozyrsky, L. Fedichkin, S. A. Gurvitz, and G. P. Berman, Phys. Rev. B **66**, 161313 (2002).
- ³³ R. Aguado and T. Brandes, Phys. Rev. Lett. **92**, 206601 (2004).
- ³⁴ J. Y. Luo, X. Q. Li, and Y. J. Yan, Phys. Rev. B **76**, 085325 (2007).
- ³⁵ J. S. Jin, X. Q. Li, M. Luo, and Y. J. Yan, J. Appl. Phys. **109**, 053704 (2011).
- ³⁶ T. Frey, P. J. Leek, M. Beck, A. Blais, T. Ihn, K. Ensslin, and A. Wallraff, Phys. Rev. Lett. **108**, 046807 (2012).
- ³⁷ T. Frey, P. J. Leek, M. Beck, K. Ensslin, A. Wallraff, and T. Ihn, Appl. Phys. Lett. **98**, 262105 (2011).
- ³⁸ M. R. Delbecq, V. Schmitt, F. D. Parmentier, N. Roch, J. J. Viennot, G. Fève, B. Huard, C. Mora, A. Cottet, and T. Kontos, Phys. Rev. Lett. **107**, 256804 (2011).
- ³⁹ Y. Mu and C. M. Savage, Phys. Rev. A **46**, 5944 (1992).
- ⁴⁰ M. Marthaler, Ph.D. thesis, University Karlsruhe (2009).
- ⁴¹ C. Emary, D. Marcos, R. Aguado, and T. Brandes, Phys. Rev. B **76**, 161404 (2007).
- ⁴² S. Haroche, *Fundamental Systems in Quantum Optics* (Elsevier, New York, 1992) p. p767, edited by J. Dalibard and J. Raimond and J. Zinn-Justin.
- ⁴³ H. Carmichael, *Statistical Methods in Quantum Optics* (Springer, Springer-Verlag Berlin Heidelberg New York, 1999).
- ⁴⁴ J. S. Jin, W.-M. Zhang, X.-Q. Li, and Y. J. Yan, eprint , arXiv:1105.013 (2011).
- ⁴⁵ S. André, P.-Q. Jin, V. Brosco, J. H. Cole, A. Romito, A. Shnirman, G. Schön, Phys. Rev. A **82**, 053802 (2010).